

## Factory Connect Camera System:

2014> MY - Equipped with 5" OR 8.4" Screen

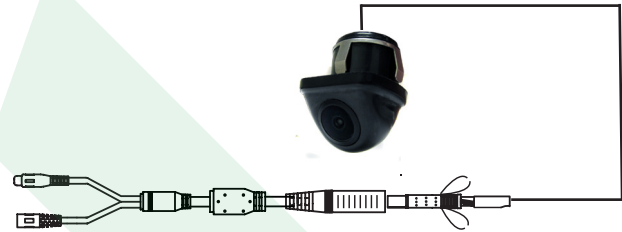
**1**
**NOTES:**

This camera requires activation by a Chrysler/Jeep Dealer. See reverse for Dealer Programming instructions. If possible, it is advised to have the Dealer "enable" the camera option prior to installation.

Camera must be connected to Ignition, not reverse power

**2**

Mount camera in suitable location on lip above license plate.  
Program optional Parking Lines.  
Route camera cable to front of vehicle.


**PARKING GUARD LINE OPTION**

1. Default Set Up: ON 2. Connecting this wire OFF

**3**
**Remove Radio / Screen**

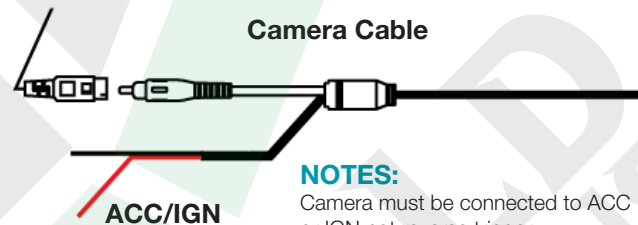
Starting at the bottom, remove bezel surrounding climate control, vents and screen (clips).

Disconnect climate control wire harness and set aside.

Remove the four 7mm screws holding in screen to access the black 52 pin plug at rear of screen (only black plug at screen). Unplug all wiring going to rear of screen and set aside.

**4**

Connect camera Red wire to suitable ACC or IGN +12V. Ground camera Black wire.


**NOTES:**

Camera must be connected to ACC or IGN not reverse trigger.

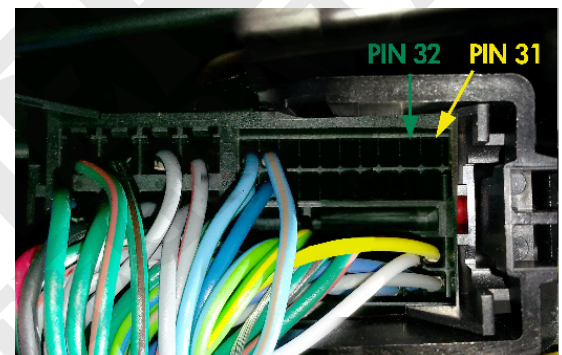
We recommend powering the camera at 12 Volt Receptacle. You can access by removing passenger side of console and unplugging.

**5**
**Connect Factory Connect Harness**

Locate pin positions 31 & 32 on 52 pin plug removed from back of radio. Release red retainer from pin side. From supplied RCA harness, insert **WHITE** Lead into pin position 31 and **BLACK** Lead into pin position 32. Connect RCA to camera. Reinstall all plugs into back of radio.

**Test & Reassemble**

After all connections are made and vehicle is programmed, start vehicle and place in reverse to activate camera and display. Reassemble.

**6**

**NOTE:**

2016> Vehicles may be pre-wired  
You can either **SPLICE** or **REMOVE** and re-pin those leads

This camera requires activation by a Chrysler/Dodge Dealer. See reverse for Dealer Programming instructions.

**\* Please note, our cameras require 6v to 12v of ignition or accessory to properly power up.**

**If you use a brake light, you'll need to add a relay and make sure the camera is powered up as long as the vehicle is on to insure you get an image when in reverse. \***



## Factory Connect Camera System:

2014> MY - Equipped with 5" OR 8.4" Screen

## Dealer Programming Instructions

### PARK VIEW REAR BACK-UP CAMERA VEHICLE CONFIGURATION

Vehicle VIN must be updated with the sales code of the added accessory in order to enable system functionality. Using the DealerCONNECT website and the scan tool, complete the procedure below:

1. Log on to **<https://dealerconnect.chrysler.com>**
2. In the "Vehicle Option" screen under the "Global Claims System" category in the "Service" tab, enter the VIN and add the sales code XAC (PARK VIEW REAR BAC-UP CAMERA) as a "Dealer Installed Option".
3. Confirm that the new sales code has been successfully added to VIN.  
With the scan tool connected to both the internet (via Ethernet port or wireless connection) and the vehicle, follow the steps below:
4. Using the scan tool select the VEHICLE PREPARATION and then select RESTORE VEHICLE CONFIGURATION.
5. Follow the step by step instructions on the scan tool to complete the Park View Rear Back-Up Camera vehicle configuration.

Please note, if your vehicle is properly activated and there is NO CAMERA installed, you will get a BLUE SCREEN in reverse telling us it's been activated properly.

If everything is installed and you get a BLACK SCREEN in reverse with the warning message displaying, this tells us the harness is installed properly and activated BUT the camera signal is not going through. Please re-check the cameras POWER and GROUND sources to make sure you're getting solid power to display an image.