

Factory Connect Camera System: Honda Civic


1 Remove lower dash panel and unplug switches.



2 Remove instrument cluster panel and unplug hazard switch.




3 Remove 3 Phillips screws attaching upper visor trim panel.

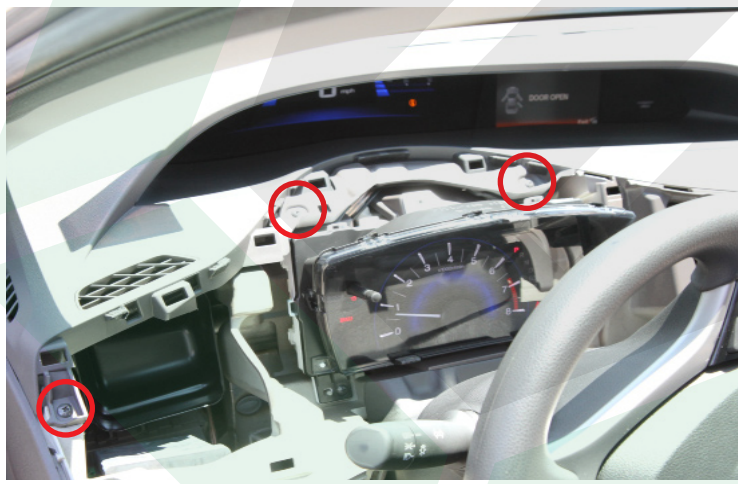

4 Remove upper dash visor trim panel.




5 Remove 5 Phillips screws that attach multi-media screen to vehicle.
Note: See inset photo for top screw locations.

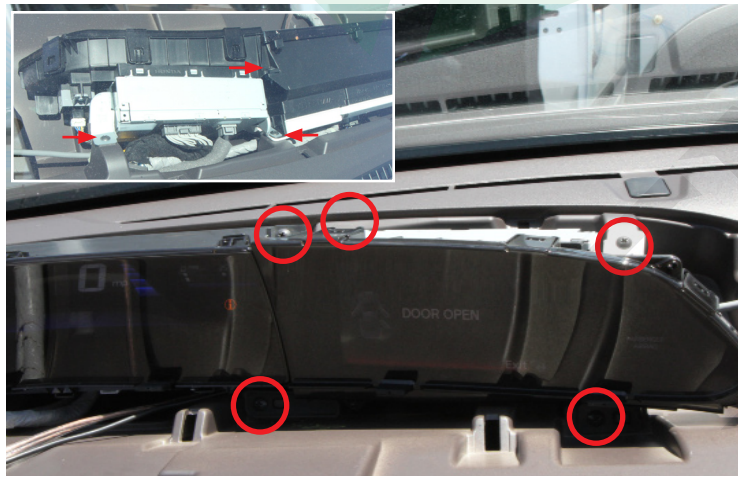


6 Remove 3 plugs from rear of multi-media screen. Plug in Factory Connect T-Harness into screen and reconnect all plugs. Route RCA and reverse trigger wire down to drivers kick panel.



- 7** Connect harness trigger wire (Red) and camera power wire (Red) to vehicle reverse wire (Brown/Silver Dot). Ground Black wire.

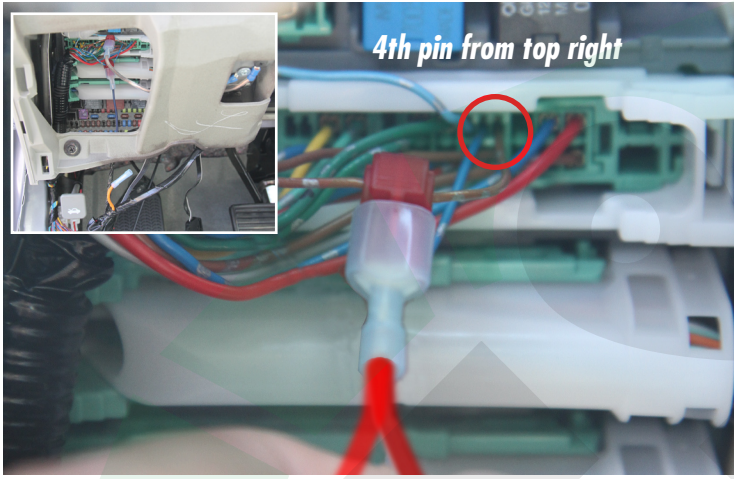

- 8** Route camera cable to trunk area. Remove 10mm bolt securing trunk lip bezel. Pull bezel to release 4 retaining clips.

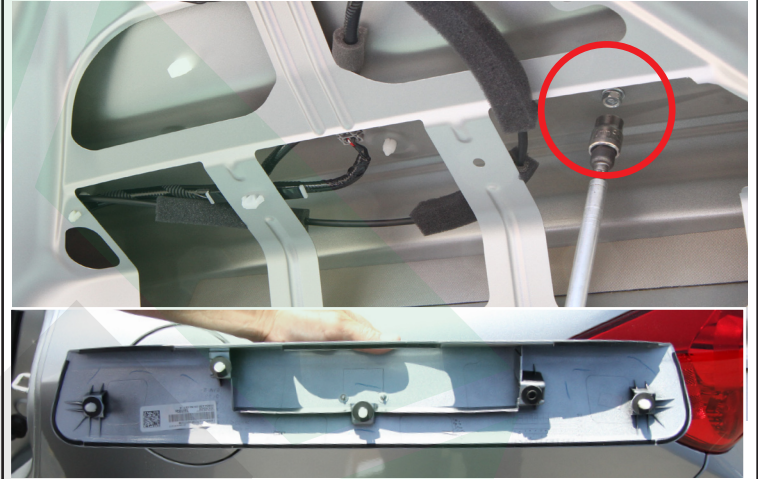

- 9** Use foam gasket to determine camera mounting location on the drivers side. Drill a 19mm hole, mount camera and secure with nut.



- 10** Unclip license plate light and route camera cable through opening. Remount light and re-attach trunk lip bezel.



- 11** Connect the 2 wires located next to camera connector plug, Green (Parking Lines) and White (Image Flip) to corresponding color wires. Connect the camera cable.



- 12** Check installation by putting vehicle in reverse to make sure image is correct and factory (yellow) parking lines are on the multi-media screen. Reassemble all parts of the vehicles to complete installation.

