

**1** Unclip upper dash panel and remove right side dash panel.



**2** Remove upper dash panel.




**3** Remove multi-media screen and unplug all plugs.



**4** Remove tailgate interior trim and cover panel. Remove fasteners attaching outer lip bezel and remove.



**5** Use foam gasket to determine camera mounting location . Drill a 19mm hole, mount camera and secure with nut.

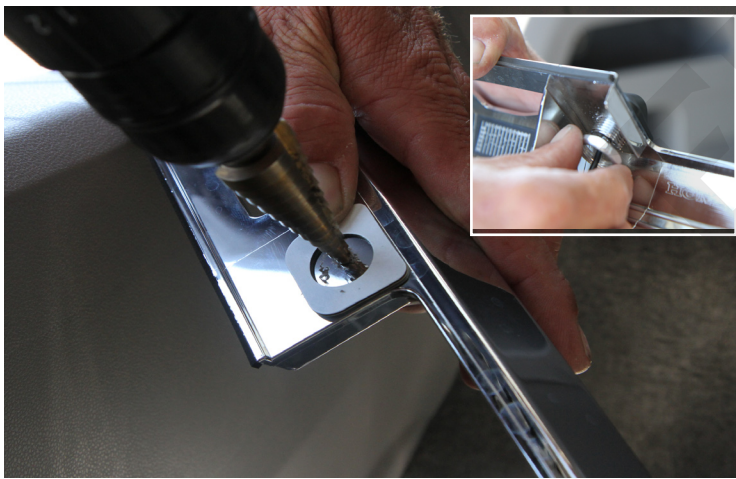


**6** Unclip license plate light and route camera cable through opening. Remount light and re-attach outer bezel with camera.




- 7** Route main camera cable through tailgate grommet from inside headliner area and connect to camera. Route camera cable across headliner towards driver's side. Route to driver's side kick panel.



- 8** Plug factory plug into T-Harness and connect supplied RCA extension. Route RCA cable down to driver's kick panel.

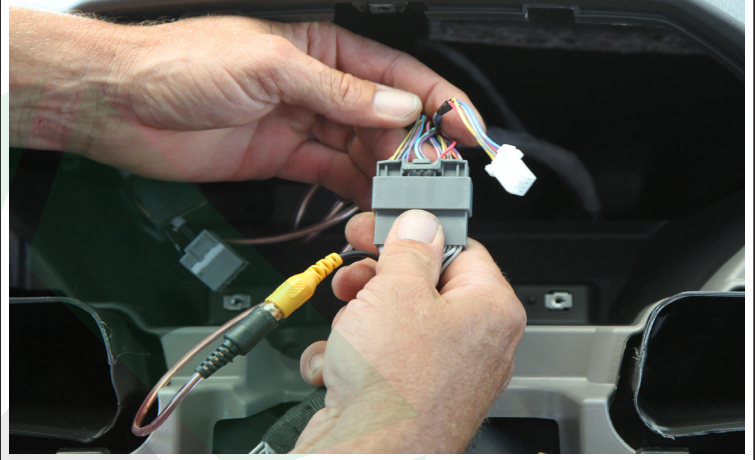

- 9** In driver's kick panel: Verify reverse trigger wire (Brown/Silver Dots) and connect camera Red wire. Ground camera Black wire. Connect RCA cable.

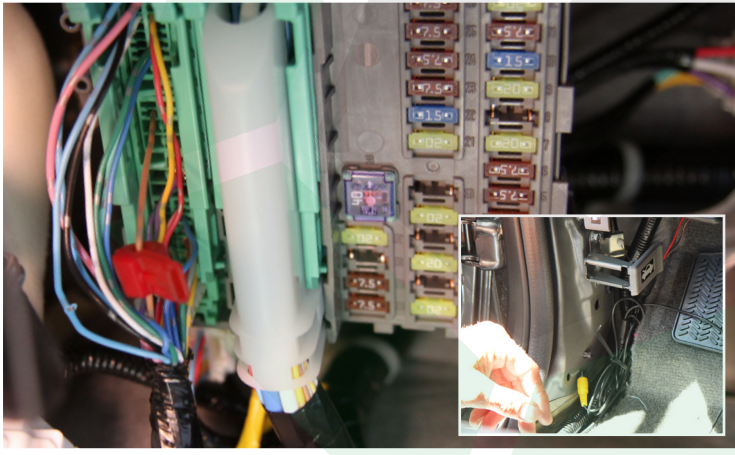

- 10** Plug T-Harness and all other plugs into rear of multimedia assembly and test system by placing vehicle in reverse.



- 11** Re-assemble dash, driver's kick panel and tailgate after verifying proper operation.

